

## CAMAC Equipment


CAMAC, Computer Automated Measurement And Control, is an IEEE-standard (583), modular, high-performance, realtime data acquisition and control system concept.

Since 1969, CAMAC has been used in many thousands of scientific, industrial, aerospace, and defense test systems around the world.

### APPLICATIONS

Switch indicator lamps  
Switch relays  
Switch solenoids  
Control valves  
Output data

## 3072 48-bit, Output Register

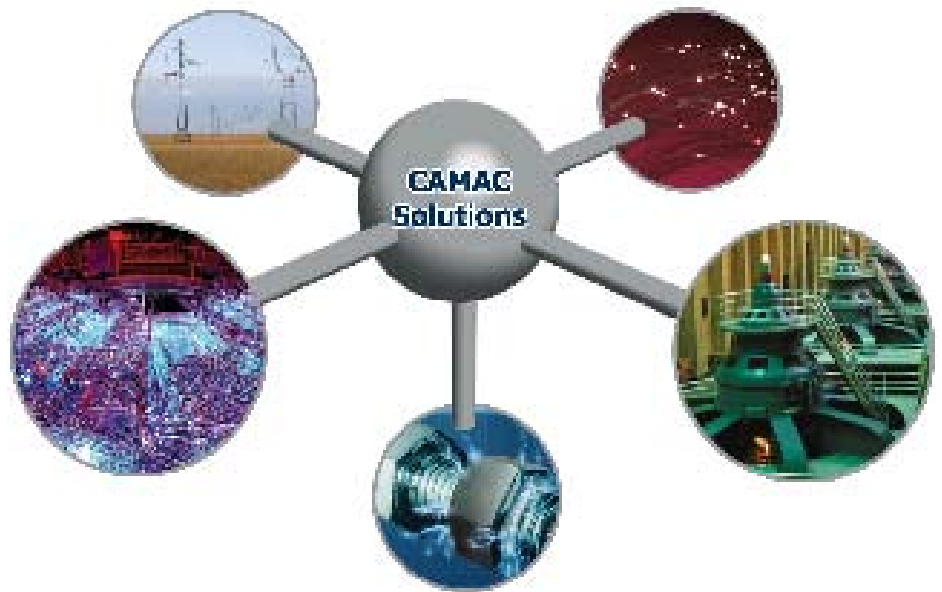

The Model 3072 is a single-width CAMAC module with 48 output switches.

### FEATURES

- 48 output switches
- 30 V open-circuit rating
- 250 mA current drive per switch
- Diode clamping option available
- TTL output option available



## GENERAL DESCRIPTION

The Model 3072 is a single-width CAMAC module with 48 output switches. These switches are organized as two 24-bit words. Each switch is an open-collector transistor suitable for driving a relay, lamp, solenoid, or similar device.

All of the switches share a common return path. An output switch is closed whenever there is a 1 in the corresponding bit of the data register. Each output can sink 250 mA with a maximum open-circuit voltage of 30 V. Inductive loads should be diode-clamped at the load to remain within the voltage rating. Internal diode suppression clamped to +24 V is available as an option. The 3072 is also available with pull-up resistors for TTL signal levels.

Three connector options are available: a 52-pin, "2D" connector at the rear of the module above the Dataway and either a 50-contact Amphenol ribbon connector or a 50-pin "D" type connector on the front panel.

## ACCESSORIES

MODULE	MATING CONNECTOR	I/O Cable (one end unterminated)
3072-A1Z	5950-Z1A	5853-Axyz I/O Cable
3072-E1Z	5934-Z1A	5851-Bxyz I/O Cable (one end unterminated)
3072-F1Z	5942-Z1A	5850-Bxyz I/O Cable (one end unterminated)

## ORDERING INFORMATION

*3074 Products and Part Numbers*

MODEL	DESCRIPTION
3072-x1z	48-bit Output Register

X:  
A = 50S Amphenol Ribbon  
E = 50P "D"  
F = 52-contact "2D" plug

Z:  
A = Standard  
B = Diode-clamped  
C = TTL pull-up

Updated December 16th, 2005

Copyright © 2005 KineticSystems Company, LLC. All rights reserved.

## KineticSystems Company, LLC

900 N. State St.  
Lockport, IL 60441-2200

### Toll-Free (US and Canada):

phone 1-800-DATA NOW  
1-800-328-2669

### Direct:

phone +1-815-838-0005  
fax +1-815-838-4424

### Email:

mkt-info@kscorp.com

To find your local sales representative or distributor or to learn more about KineticSystems' products visit:

**[www.kscorp.com](http://www.kscorp.com)**